





10 Km/h from behind machine

Ge		

Spread Width Certificate No. 18.0 m 319791 Spreader KRM Bredal K65 **Date Tested** 28/9/2022 Disc/Vane/Type A Disc Rate Setting 175 Kg/Ha Spread Setting Gbox 120 Shute 2 Forward Speed 12 Km/h

Border Setting N/A

PTO/Disc Speed PTO (RPM) 650 Crop/Ground/Cover Grass Height 80cm from side of disc Tilt 0.0

Residue on Vanes

Product Data							Grader Box	
Fertiliser	Soverei	gn Sulphur						
Density (Kg/L)	1.14	Batch No.	20/07/22				88	
Strength (Kg/Force)	3	6	5	5.5	4.5	Av.		
	3	3.5	3	4	6	4.35		

Wind

No

Information

Lumping in Bag

This report is only applicable to the combination of machine, test conditions and products tested on the day. Any variations from these may result in inconsistent applications.


Test Data

Coefficient of Variation measures the accuracy of the spread Pattern. For fertilisers a CV of 15% (as recommended in EB13739-2) should be attainable in field conditions. <10% Excellent, 10%-15% Good, 15%-20% Poor, >20% Unacceptable.

The CV attained on the first run was 7.64%.

No

There is no Pass/Fail for NSTS requirements.

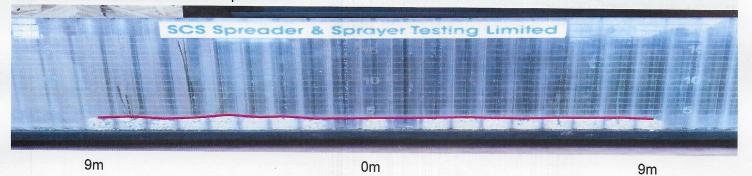

Comments

Final spread pattern successful.

There was 6m of measurable overlap beyond the spreadwidth.

Spreader & Sprayer Testing Ltd
Rookery Farm, Wheaton Aston, Stafford,
Staffordshire, ST19 9QF
01785 840849
info@spreadcheck.com
www.spreadcheck.com

© Copyright SCS Spreader & Sprayer Testing Ltd